


Notes: A. Can not have scratched on the surface, crushed, oxidation and other adverse
 B. Burr height can not exceed 5% of the thickness of the material
 C. Compliance with environmental substances management standards

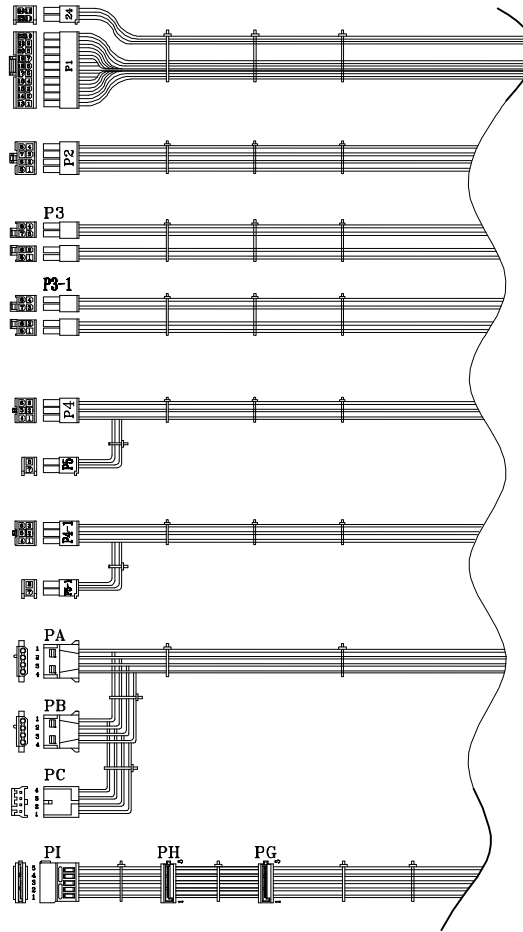

REF. ID	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1/24	1	+3.3VDC	ORANGE	18	WST	400±15MM
	2	+3.3VDC	ORANGE	18	P80-	
	3	COM	BLACK	18	I42002K11D-	
	4	+5VDC	RED	18	P4-	
	5	COM	BLACK	18	I42002K11D	
	6	+5VDC	RED	18	or EQUIV.	
	7	COM	BLACK	18		
	8	PW-OK	GRAY	22		
	9	+5Veb	PURPLE	18		
	10	+12V3	YEL/BLUR	18		
	11	+12V3	YEL/BLUR	18		
	12	+3.3VDC	ORANGE	18		
	13	+3.3VDC	ORANGE	18		
	14	-12VDC	BLUE	22		
	15	COM	BLACK	18		
	16	PS-ON	GREEN	22		
	17	COM	BLACK	18		
	18	COM	BLACK	18		
	19	COM	BLACK	18		
	20	-5V	WHITE	22		
	21	+5VDC	RED	18		
	22	+5VDC	RED	18		
	23	+5VDC	RED	18		
	24	COM	BLACK	18		
P2	1	COM	BLACK	18	MOLEX 39-01- 2080 or EQUIV.	400±15MM
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	COM	BLACK	18		
	5	+12V1	YELLOW	18		
	6	+12V1	YELLOW	18		
	7	+12V2	YEL/BLACK	18		
P3	1	COM	BLACK	18	WST P4 I42002K3B+	400±15MM
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	COM	BLACK	18		
P3-1	5	+12V2	YEL/BLACK	18	P4 I42002K3B+ or EQUIV.	70±5MM
	6	+12V2	YEL/BLACK	18		
	7	+12V1	YELLOW	18		
	8	+12V1	YELLOW	18		
P4	1	COM	BLACK	18	WST P4- I42002K4B or EQUIV.	400±15MM
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	COM	BLACK	18		
P4-1	5	+12V2	YEL/BLACK	18	P4- I42002K4B or EQUIV.	70±5MM
	6	+12V2	YEL/BLACK	18		
P5	7	+12V1	YELLOW	18	AMP I-480424-0 or EQUIV.	400±15MM
	8	+12V1	YELLOW	18		
PA	1	+12V3	YEL/BLUR	18	AMP I-480424-0 or EQUIV.	150±10MM
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	+5V	RED	18		
PB	1	+12V3	YEL/BLUR	18	AMP I-480424-0 or EQUIV.	150±10MM
	2	COM	BLACK	18		
	3	COM	BLACK	22		
	4	+5V	RED	18		
PC	1	+5V	RED	22	AMP 171822-4 or EQUIV.	400±15MM
	2	COM	BLACK	22		
	3	COM	BLACK	22		
	4	+12V3	YEL/BLUR	22		
PG	1	+3.3VDC	ORANGE	18	MOLEX SD-87928 -0011 or EQUIV.	150±10MM
	2	COM	BLACK	18		
	3	-5V	RED	18		
	4	COM	BLACK	18		
PH	1	+12V3	YEL/BLUR	18	MOLEX SD-87928 -0011 or EQUIV.	400±15MM
	2	COM	BLACK	18		
	3	+5V	RED	18		
	4	COM	BLACK	18		
PI	5	+12V3	YEL/BLUR	18	MOLEX SD-87582 -001 or EQUIV.	150±10MM
	1	+3.3VDC	ORANGE	18		
	2	COM	BLACK	18		
	3	+5V	RED	18		
	4	COM	BLACK	18		

REV	DATE	CONTENT CHANGES	BCN NO.

Not Indicated angle tolerance±0.1°

~30	±0.10	±0.15	APPROVED	DATE	DWG NO.: SDGR-FLXB350	REV: 1.0	UNIT: mm	SCALE:	SHEET: 1:1
30°60	±0.15	±0.20							
60°150	±0.20	±0.25							
150°300	±0.25	±0.30							
300°630	±0.30	±0.35							
630°1000	±0.35	±0.40	DESIGNED	DATE	PART NO.:				
			DRAWER	DATE 2015-04-25	TITLE:				

Solid Gear USA